


Performa White™

Fully coated CTMP board with light pigment-coated reverse

Performa White is a coated GC1 board with a three-layer fibre construction and CTMP (chemi-thermomechanical pulp) in the middle layer. It is triple-pigment-coated on the top side, with one layer of pigment coating on the reverse side. Performa White is also available hard-sized (HS).

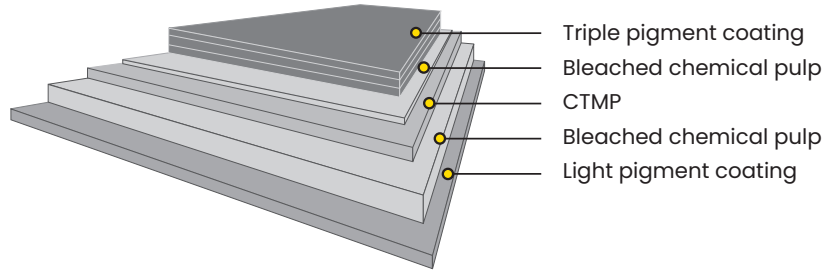

Issued: 12.2025
Replaces: 11.2024

Technical specification

Property	Unit	Tolerance													Standard
Grammage	g/m ²	±4%	180	200	220	240	260	280	300	315	325	350	370	400	ISO 536
Thickness	µm	±5%	255	295	325	365	400	440	475	505	535	585	625	675	ISO 534
Bending resistance L&W 15° MD	mN	-15%	108	160	201	265	353	445	535	608	690	800	900	1080	ISO 2493
Bending resistance L&W 15° CD	mN	-15%	53	73	92	120	160	202	243	276	290	370	410	500	ISO 2493
Bending moment Taber 15° MD	mNm	-15%	5.2	7.7	9.7	12.8	17.0	21.5	25.8	29.3	33.3	38.6	43.5	52.2	
Bending moment Taber 15° CD	mNm	-15%	2.6	3.5	4.4	5.8	7.7	9.8	11.7	13.3	14.0	17.9	19.8	24.2	
Bending stiffness DIN 5° MD	mNm	-15%	8.2	14.3	18.2	24.4	33.7	43.0	51.3	59.1	66.8	78.7	91.7	109.8	
Bending stiffness DIN 5° CD	mNm	-15%	4.4	6.5	8.3	11.5	14.3	18.3	22.4	25.9	30.9	35.9	42.7	51.5	
Moisture	%	±1	6.2	7.0	7.0	8.0	8.1	8.3	8.6	8.7	8.7	8.9	9.1	9.3	ISO 287
ISO Brightness C/2°, Top	%	min. 87	90	90	90	90	90	90	90	90	90	90	90	90	ISO 2470-1
ISO Brightness C/2°, Reverse	%	min. 85	88	88	88	88	88	88	88	88	88	88	88	88	ISO 2470-1
ISO Brightness D65/10°, Top	%		97	97	97	97	97	97	97	97	97	97	97	97	ISO 2470-2
CIE Whiteness D65/10°, Top			120	120	120	120	120	120	120	120	120	120	120	120	ISO 11475
CIE Whiteness D65/10°, Reverse			114	114	114	114	114	114	114	114	114	114	114	114	ISO 11475
L*, D65/10°, Top			95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	95.0	ISO 5631-2
a*, D65/10°, Top			1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	ISO 5631-2
b*, D65/10°			-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	-7.2	ISO 5631-2
Surface Smoothness PPS10, Top	µm	max. 1.7	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	ISO 8791-4
Surface Smoothness PPS10, Reverse	µm	max. 8.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	ISO 8791-4
Gloss 75°	%		45	45	45	45	45	45	45	45	45	45	45	45	ISO 8254-1
Scott Bond	J/m ²	min. 100	145	145	145	145	145	145	145	145	145	145	145	145	TAPPI 569 om-22
Edge Wicking	kg/m ²	max. 1.0	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	Mill method
Cobb ₆₀ , Top	g/m ²	max. 60	30	30	30	30	30	30	30	30	30	30	30	30	ISO 535
Cobb ₆₀ , Reverse	g/m ²	max. 60	30	30	30	30	30	30	30	30	30	30	30	30	ISO 535
Robinson chocolate test	-		max 0.5 for one year storage in reels/pallets											EN1230-2	

Edge wicking test: For hard-sized.

Moisture: tolerance for grammages 325–400 g/m² is ±1.5 %.

Surface Smoothness PPS10, reverse: max tolerance for grammages 300–400 g/m² is 9.0 µm.

All properties according to mill measurements from board machine production. Laboratory test climate 23°C/50% RH (according to ISO 187). Tolerances based upon 95% confidence limits, apply to delivered reel/pallet average.

Bending moment Taber 15° and Bending resistance L&W 15° are binding. Bending stiffness DIN 5° are indicative. Bending moment Taber 15° calculated from Bending resistance L&W 15°.

Performa White™

Fully coated CTMP board with light pigment-coated reverse

Certificates

EU Ecolabel standard contract FI/011/002, fulfils the ecological criteria for Graphic Paper, (EU) 2019/70, L15/27 (17.1.2019).
 Energy management ISO 50001
 Occupational health and safety ISO 45001
 Food safety FSSC 22000
 Environmental management ISO 14001
 Quality management ISO 9001



FSC and PEFC certified board available upon request.



EU Ecolabel: FI/011/002

The EU Ecolabel confirms that the board fulfils the European Commission's ecological criteria for copying and graphic paper and is therefore only available for graphical end uses. EU Ecolabel available upon request on graphical end uses.



Paperboard can be recycled

Key characteristics and main enduses

Performa White is an aesthetically appealing board that combines performance with a beautiful white appearance. This board is ideal for chocolate, confectionery and cosmetic packaging, as well as for graphical end uses, including the most demanding finishing effects. Thanks to the triple-pigment-coated top side, Performa White gives a very good print result, and the reverse side is also suitable for full-colour printing. The high brightness and whiteness contribute to optimal visual appearance.

Printing and finishing techniques

The product can be used with different printing techniques such as offset, flexo, rotogravure and digital printing. In digital printing, the product is suitable for several different sheet- or web-fed presses. Inkjet, dry or liquid toner technology can be used, although in some cases, pretreatment of the substrate might be required. The latest certification status can be verified on the press manufacturer's website or with local Stora Enso representatives. It is important to check the limitations of the equipment, particularly because of the exceptional difference in the thickness and stiffness of board compared with paper in the same grammages. When running thicker substrates, the press manufacturer's recommendations should be referred to for optimal grain direction. Essentially all of the same finishing processes apply to both digitally printed and offset printed work. Since a wide variety of digital printing equipment is available in the market, it is important that a new commercial print job is always preceded by a trial run, including all required printing and converting process phases. The product works very well with different finishing techniques, such as embossing, hot foil stamping and others. It is suitable for laser coding and ink jet marking. Certificates according to PTS-DF 105/2023 and PTS-DF 103/2022 are available upon request.

Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored in its original cover indoors, sheltered from rain and snow. The recommended storage conditions are 50–55% relative humidity and 20–23°C.