


# CKB Nude™

## Multilayer kraft board

CKB Nude is an uncoated, brown, multilayer kraft back board made of unbleached chemical pulp and additional CTMP in the middle layer. The all-brown board has a natural look and feel, and is fully made of virgin fibre.

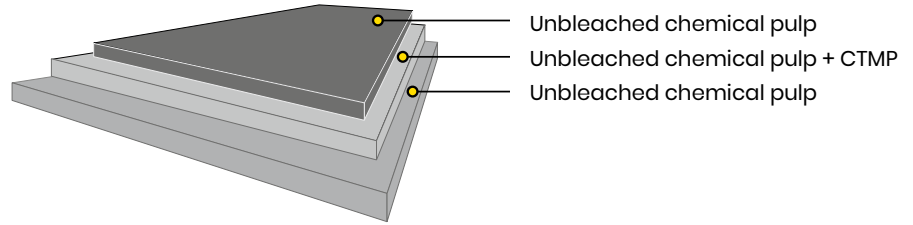

Issued: 07/2025  
Replaces: 04/2025

### Technical specification

Property	Unit	Tolerance						Standard
Grammage	g/m <sup>2</sup>	±4%	205	230	255	325	345	ISO 536
Thickness	µm	±5%	380	445	495	580	630	ISO 534
Bending moment Taber 15° MD	mNm	-15%	14.1	21.5	28.6	49.2	56.7	
Bending moment Taber 15° CD	mNm	-15%	5.6	8.6	11.4	18.1	21.0	
Bending resistance L&W 15° MD	mN	-15%	293	446	593	1020	1175	ISO 2493
Bending resistance L&W 15° CD	mN	-15%	117	178	237	375	435	
Moisture	%	±1	7.5	7.5	7.5	8.0	8.5	ISO 287
Surface Smoothness Bendtsen, Top	ml/min	max 700	400	400	400	400	400	ISO 8791-2
Surface Smoothness Bendtsen, Reverse	ml/min	max 2000	900	900	900	900	900	
Tearing resistance GM	mN		3050	3500	3950	5300	5700	ISO 1974
Cobb <sub>60</sub> , Top	g/m <sup>2</sup>		30	30	30	30	30	ISO 535
Cobb <sub>60</sub> , Reverse	g/m <sup>2</sup>		30	30	30	30	30	

### Certificates


Quality management ISO 9001  
 Environmental management ISO 14001  
 Food safety FSSC 22000  
 Occupational health and safety ISO 45001  
 Energy management ISO 50001



FSC and PEFC certified board available upon request.



For grammages ≤ 343 g/m<sup>2</sup> industrially compostable according to EN 13432 standard.



Paperboard can be recycled

### Key characteristics and main enduses

CKB Nude has been designed to meet consumer preferences for sustainable, renewable and recyclable packaging materials with a natural look and feel. Made from pure virgin fibre, CKB Nude is a safe choice for food packaging but also for many other products, such as beverage, cosmetics and luxury packaging. CKB Nude provides a fantastic opportunity to differentiate a brand on the shelf. Its eye-catching and organic appeal embraces the beauty of nature's own shades of brown – creating a look that is both timeless and trendy. CKB Nude offers great stiffness, strength, runnability and convertibility.

### Printing and finishing techniques

The product can be used with different printing techniques such as offset, flexo and digital printing. In digital printing, the product is suitable for several different sheet- or web-fed presses. Inkjet, dry or liquid toner technology can be used, although in some cases, pretreatment of the substrate might be required. The latest certification status can be verified on the press manufacturer's website or with local Stora Enso representatives. It is important to check the limitations of the equipment, particularly because of the exceptional difference in the thickness and stiffness of board compared with paper in the same grammages. When running thicker substrates, the press manufacturer's recommendations should be referred to for optimal grain direction. Essentially all of the same finishing processes apply to both digitally printed and offset printed work. Since a wide variety of digital printing equipment is available in the market, it is important that a new commercial print job is always preceded by a trial run, including all required printing and converting process phases. The product works very well with different finishing techniques, such as embossing, hot foil stamping and others.

### Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored in its original cover indoors, sheltered from rain and snow. The recommended storage conditions are 50–55% relative humidity and 20–23°C.